


# Beam Displacer

## Applications

WSS  
Circulators  
Interleavers

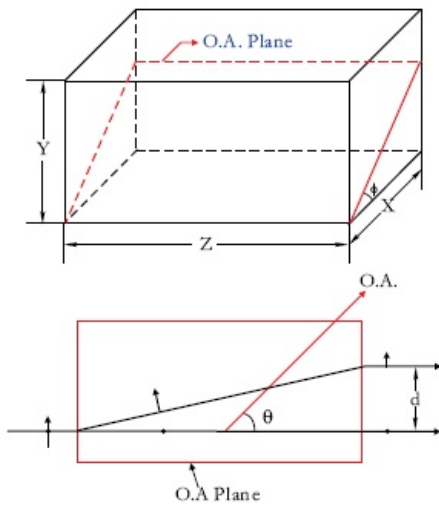

## Capability

Parameter	
Material	YVO4
Typical Dimension	2 x 2 x 7mm, 2.6 x 2.6 x 10mm
O. A. Orientation Tolerance	+/- 0.1°
Flatness	$\lambda/10@632.8\text{nm}$
Wavefront Distortion	$\lambda/4@632.8\text{nm}$
Surface Quality (scratch/dig)	better than 10-5
Clear Aperture	>90%
AR Coating	$R < 0.20\% @ \lambda_c \pm 40\text{nm}$ , $\lambda_c = 1310, 1550\text{nm}$

Other sizes, orientation of optical axis and coatings are also available upon request

