


Metal Coated Mirror

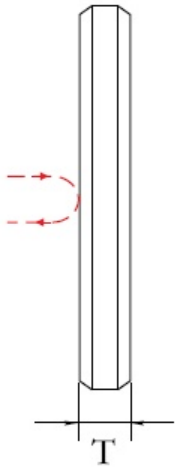

Applications

WSS
Optical Passive Components
Optical Measurement System
Tunable Laser

Capability

Parameter	
Material	N-Bk7 grade A optical glass or Other optics glass
Dimension	smallest to 1 x 1 x 1mm & largest to 6"
Thickness Tolerance	+/-0.05mm
Flatness	typical: $\lambda/4@632.8$ nm, up to $\lambda/10@632.8$ nm
Surface Quality (scratch/dig)	better than 20-10
Coating	R Au HR coated >99 %@S, C or L band

Other sizes, material and coatings are also available upon request

